



Monoblock pumps SM (GZA) Stainless steel centrifugal pumps AISI 304, AISI 316











Characteristic


Monoblock centrifugal pumps SM (GZA) are designed for use in heating systems, cold and hot water supply, air conditioning, as well as for other industrial applications.

- maximum working pressure 10 bar,
- head 71 m,
- capacity 72 m³ /h,
- maximum temperature of the pumped liquid 120°C
- pump housing and impeller material: stainless steel AISI 304, AISI 316.

Model (GB5662)	Model (DIN24255)	Power		Q	H(m)															
		KW	HP		0	150	200	300	333	400	600	700	900	200	1900	2100	2200	2300		
				L/min m ³ /h	0	9	12	18	20	24	36	42	54	72	114	126	132	138		
50-32-160/2.2	50-32-160/2.2	2.2	3.0	H(m)	37	34	32	27	25											
50-32-160/3.0	50-32-160/3.0	3.0	4.0		44	40	37,5	31	28											
50-32-200/4.0	50-32-200/4.0	4.0	5.5		55	52	49,5	43,5	40,5	37										
50-32-200/5.5	50-32-200/5.5	5.5	7.5		70,5	67,5	65	58,5	55	51										
65-50-125/2.2	65-40-125/2.2	2.2	3.0								17,5	14,9	13,4	10,7						
65-50-125/3.0	65-40-125/3.0	3.0	4.0								20,5	18,4	17	14,4	8					
65-50-160/4.0	65-40-160/4.0	4.0	5.5								26	24	22,5	20,5	14					
65-50-160/5.5	65-40-160/5.5	5.5	7.5								31	28,5	27	24,5	18					
65-40-200/7.5	65-40-200/7.5	7.5	10								38,5	36	35	32,5	26					
65-40-200/9.2	65-40-200/9.2	9.2	12.5									49	47,5	44,5	34					
80-65-125/4.0	65-50-125/4.0	4.0	5.5										19	17,3	13,5	6,3				
80-65-125/5.5	65-50-125/5.5	5.5	7.5										24	22,2	18,5	10,8	8			
80-65-160/7.5	65-50-160/7.5	7.5	10										29,5	27,8	24	16,1	13,4	12		
80-65-160/9.2	65-50-160/9.2	9.2	12.5										34,5	32,8	29	21,1	18,3	16,8		
80-50-200/11	65-50-200/11	11	15										38,5	37,1	33,5	25,8	23	21,5	20	
80-50-200/15	65-50-200/15	15	20									45,5	44	40,5	32,6	29,6	28	26,5		

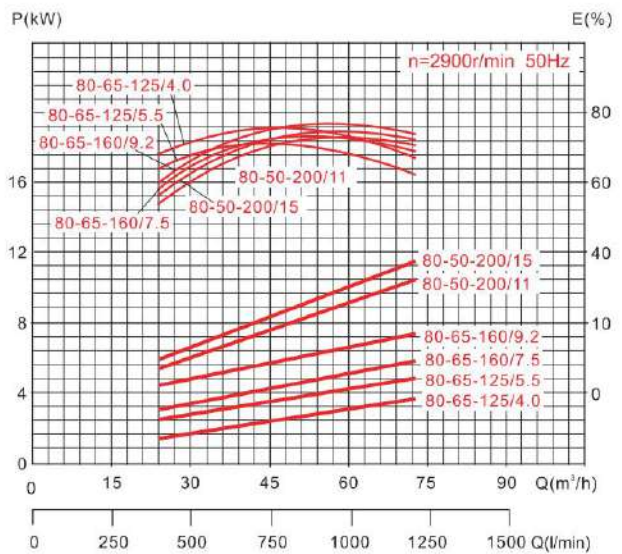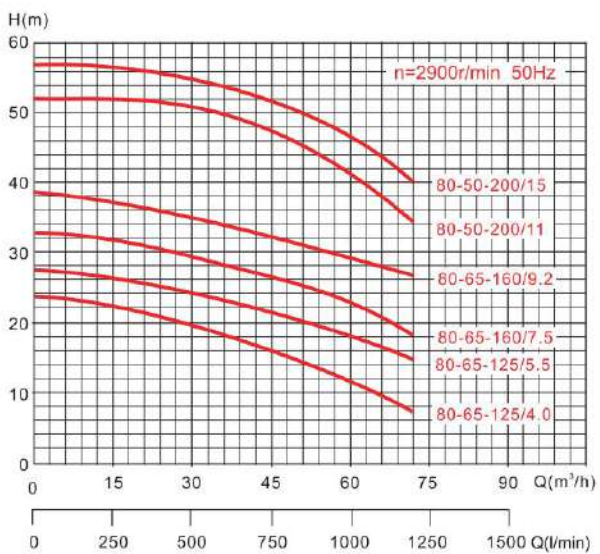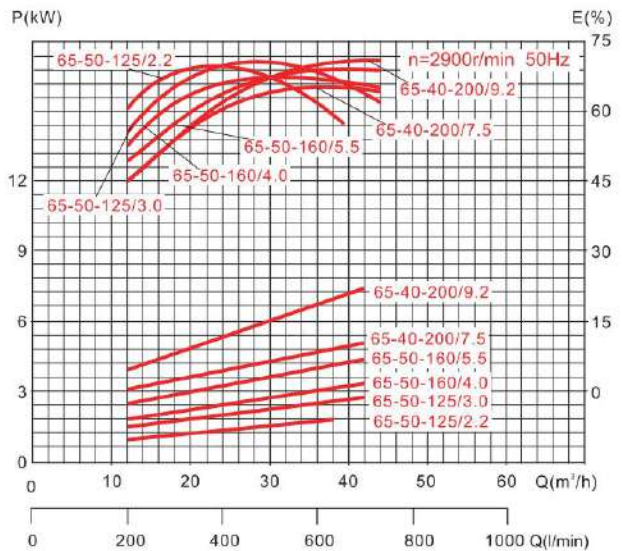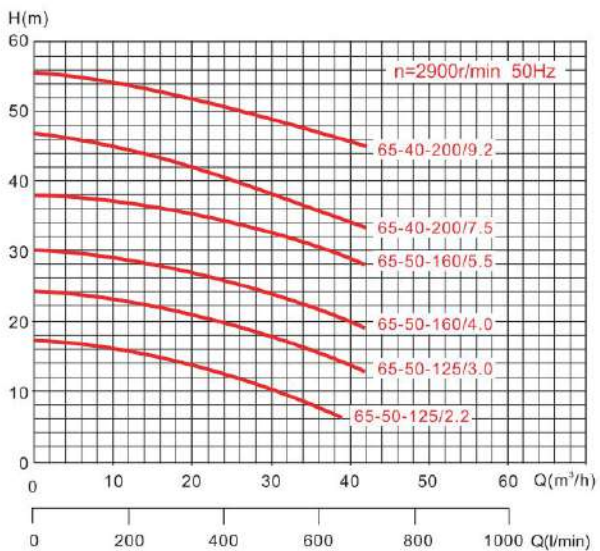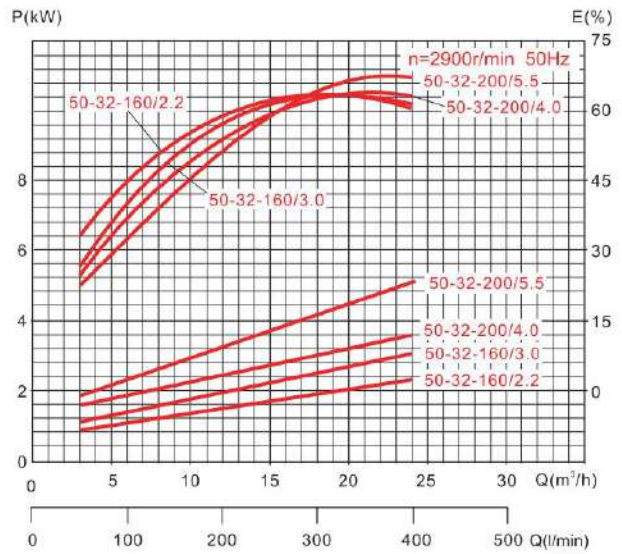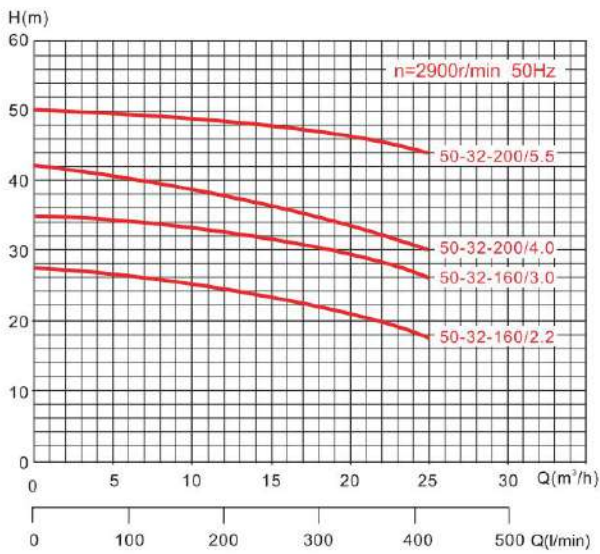

dimensions

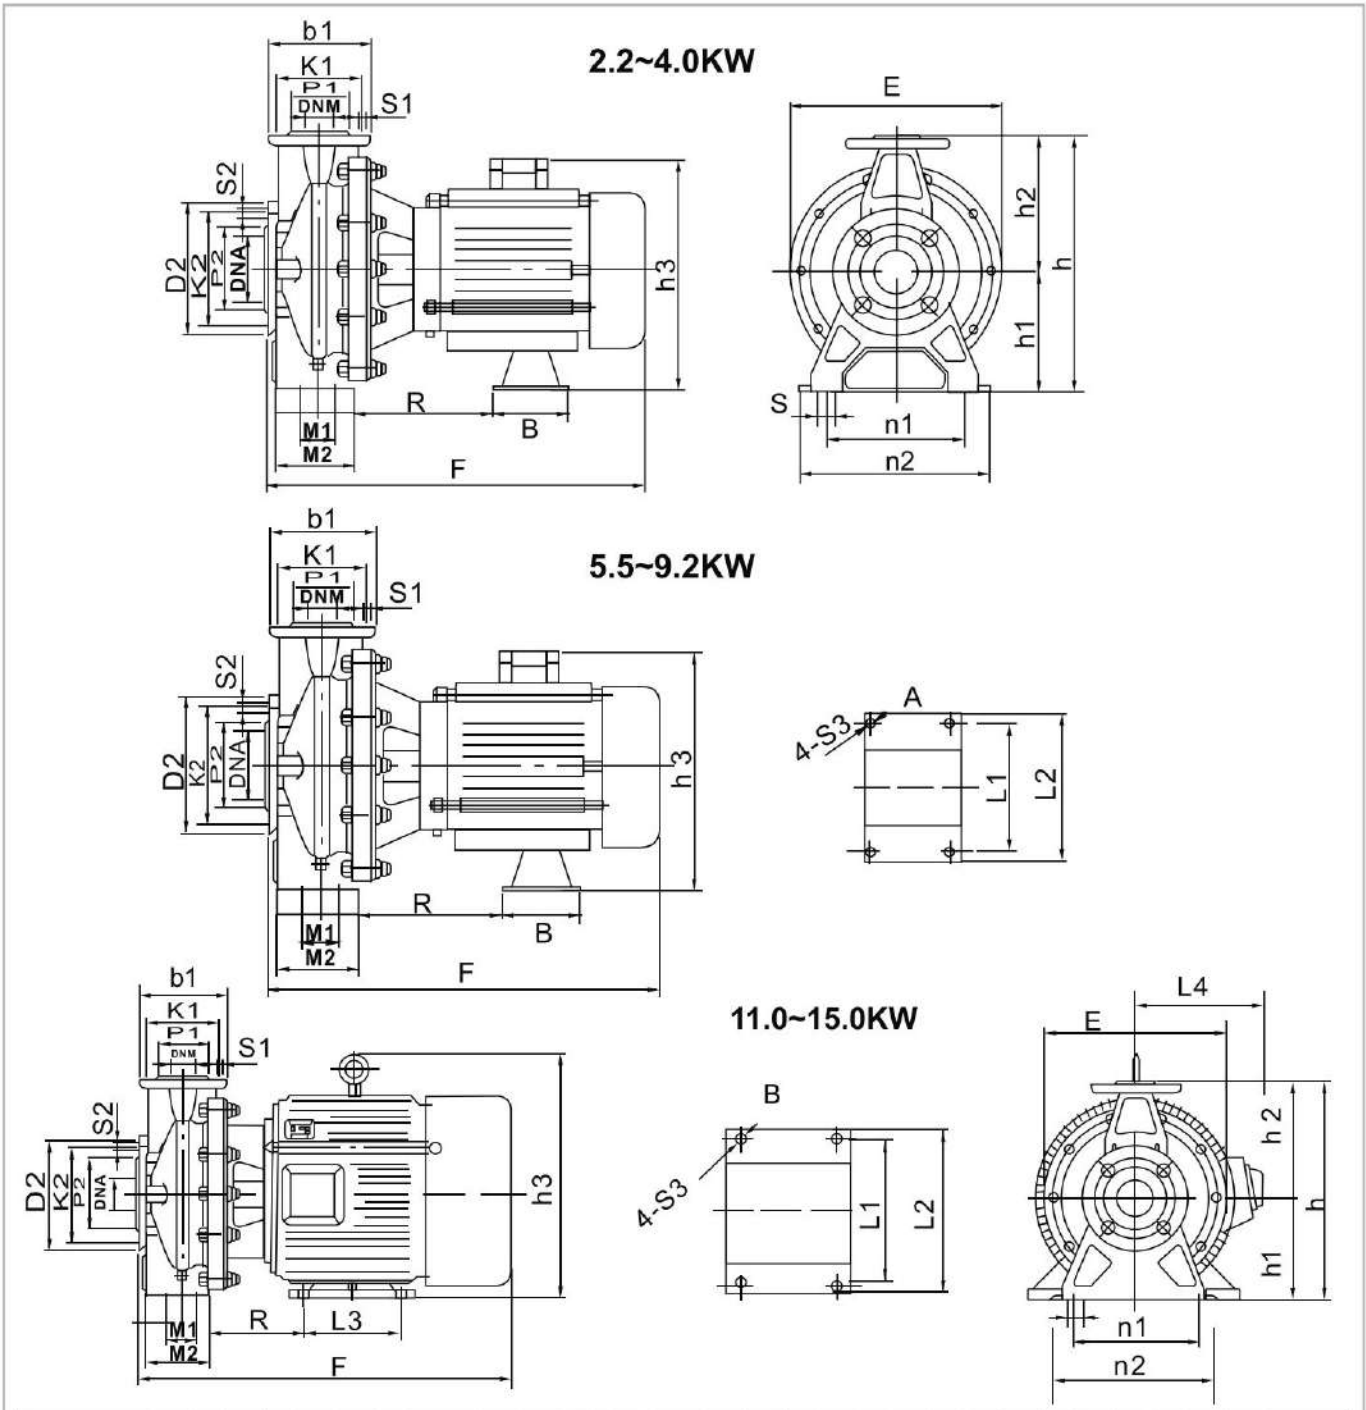

Model	φE	F	h	h1	h2	h3	a	m1	m2	n1	n2	S	B	R	P	L1	L2	L3	L4	S3	D2	K2	P2	S2	D1	K1	P1	S1	DN	DNM	Weight (kg)
50-32-160/2.2	244	492	292	132	160	252	80	70	118	190	240	15	42	223	/	/	/	/	/	/	165	125	99	18	140	100	76	18	50	32	29.7
50-32-160/3.0	244	481	292	132	160	269	80	70	118	190	240	15	38	241	/	/	/	/	/	/	165	125	99	18	140	100	76	18	50	32	35.5
50-32-200/4.0	295	519	340	160	180	297	80	70	118	190	240	15	48	233	/	/	/	/	/	/	165	125	99	18	140	100	76	18	50	32	43
50-32-200/5.5	295	582	340	160	180	340	80	70	118	190	240	15	/	205	216	248	140	/	14	165	125	99	18	140	100	76	18	50	32	63	
65-50-125/2.2	244	489	292	132	160	252	80	70	118	190	240	15	42	220	/	/	/	/	/	/	185	145	118	18	165	125	99	18	65	50	30
65-50-125/3.0	244	479	292	132	160	269	80	70	118	190	240	15	38	238	/	/	/	/	/	/	185	145	118	18	165	125	99	18	65	50	36
65-50-160/4.0	244	479	292	132	160	269	80	70	118	190	240	15	48	233	/	/	/	/	/	/	185	145	118	18	165	125	99	18	65	50	40
65-50-160/5.5	244	582	219	132	160	312	80	70	118	190	240	15	/	/	205	216	248	140	/	14	185	145	118	18	165	125	99	18	65	50	62
65-40-200/7.5	295	602	340	160	180	340	100	70	136	212	265	15	/	/	205	216	248	140	/	14	185	145	118	18	150	110	84	18	65	40	68
65-40-200/9.2	295	641	340	160	180	340	100	70	136	212	265	15	/	/	224	216	248	140	/	14	185	145	118	18	150	110	84	18	65	40	78
80-65-125/4.0	244	509	340	160	180	297	100	70	142	212	265	15	48	243	/	/	/	/	/	/	200	160	132	18	185	145	118	18	80	65	41
80-65-125/5.5	244	612	340	160	180	340	100	70	142	212	265	15	/	/	215	216	248	140	/	14	200	160	132	18	185	145	118	18	80	65	62
80-65-160/7.5	244	612	340	160	180	340	100	70	142	212	265	15	/	/	215	216	248	140	/	14	200	160	132	18	185	145	118	18	80	65	67
80-65-160/9.2	244	651	340	160	180	340	100	70	142	212	265	15	/	/	215	216	248	140	/	14	200	160	132	18	185	145	118	18	80	65	77
80-50-200/11	295	696	360	160	200	385	100	70	140	212	265	15	/	/	215.5	254	330	210	265	15	200	160	132	18	185	125	99	18	80	50	135
80-50-200/15	295	696	360	160	200	385	100	70	140	212	265	15	/	/	215.5	254	330	210	265	15	200	160	132	18	185	125	99	18	80	50	146